

# CI-CO LP

- LOW PROFILE FOR SPACES WITH LOW CEILINGS
- HIGH EFFICIENCY FANS
- INSPECTION HATCH FOR MAINTENANCE PURPOSES
- SPECIAL SUPPORT TO DIRECT THE AIR FLOW



**CICO-LP/EC**  
EC TECHNOLOGY MOTOR



**CICO-LP/AC**  
IP-54 HIGH EFFICIENCY MOTOR



JET FANS WITH A LOW PROFILE  
FOR EXTRACTING AIR AND AIR  
POLLUTANTS IN CONFINED SPACES



## CI-CO LP

---

A new compact, low profile fan version for use in confined spaces with low ceiling heights. Suitable for the extraction of contaminants and CO in car parks, access tunnels, exit routes and shopping centres.

Its lightweight permits easy, fast installation and optimal operation due to the low noise level and aerodynamically-optimised impellers that achieve high fan efficiency and thrust.



### **EASY TO CLEAN AND MAINTAIN**

The design of the inspection hatches used to access the impeller and motor allows for easy cleaning and maintenance of the unit.



### **SPECIAL DESIGN FOR EASY MOUNTING**

The supply of a template with a special design for fast mounting and the option of installing the fan in the best air exhaust direction is an important benefit that saves time in installations.



### **EC TECHNOLOGY**

CI-CO LP/EC model fitted with a high efficiency EC Technology motor with built-in electronics and the option of 0-10V regulation, which makes it ideal for saving energy costs in efficient installations.

# CI-CO LP



**Low profile, centrifugal induction jet fans**



JET FANS with a low profile for extracting air, air pollutants and CO in car parks and confined spaces.

**Fan:**

- Galvanised sheet steel casing.
- Impeller with high performance reaction blades.
- Access hatches for cleaning and maintenance.
- Support template for fast, easy mounting.

• **CI CO LP/AC:**


- 108-132V 60Hz AC motor. Built-in thermal protector. IP-54 protection.
- 220-230V 50/60Hz EC motor. Built-in thermal protector. IP-54 protection. Maximum temperature of air to be carried -20°C+60°C.

**Motor:**

- **CI CO LP/EC:** 200-277V 50/60Hz EC motor. Built-in thermal protector. IP-54 protection.

**Finish:**

- Anti-corrosive finish on galvanised sheet steel.



Maintenance hatch



Support template

## Order code



## Technical characteristics

Model	Speed (r/min)	Maximum admissible current (A)	Supply voltage/ frequency	Max. flow rate (m <sup>3</sup> /h)	Thrust (N)	Maximum electric power (W)	Sound pressure level (dBA)*	Weight (kg)	According to ErP
CI-CO LP/EC	2450	1.84	200-277V 50/60Hz	2782	13	230	69	20	2018
CI-CO LP/AC 220V	2600	2.14	220/230 50/60Hz	2520	11	490	68	20	2018
CI-CO LP/AC 110V	2620	4.10	108-132V 60Hz	2870	13	460	69	20	2018



\*irradiated sound level at 3m



## Erp. (Energy Related Products)

Information on Directive 2009/125/EC can be downloaded from the SODECA website or the QuickFan selector programme

### Dimensions mm


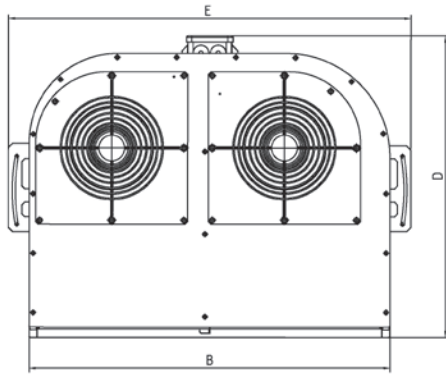


Model	A	B	C	D	E
CI-CO LP	535	700	145	584	781

### Characteristic curves

Q= Flow rate in m<sup>3</sup>/h and m<sup>3</sup>/s.


Pe= Static pressure in mmH<sub>2</sub>O, Pa and inwg.

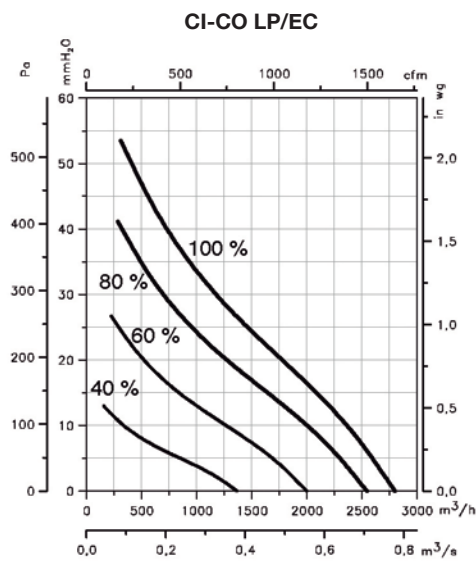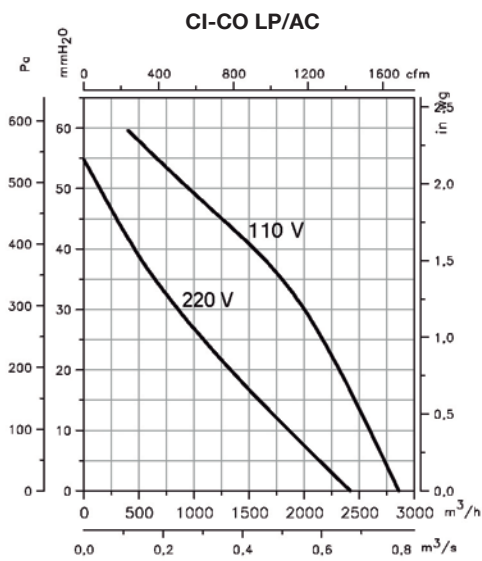

### Accessories



### Blade

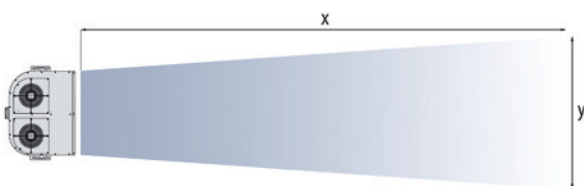

	CI-CO/LP EC	CI-CO/LP AC 110V	CI-CO/LP AC 220V
Speed (rpm)	2450	2600	2600
Impulse (N)	13	13	11
Air exhaust speed (m/s)	15	16	14
Air speed (m/s)	1	1	1
Maximum length x of blade (m)	20	21	18.5
Maximum length y of blade (m)	8.5	9	8



## WE IMPROVE THE USER'S EXPERIENCE IN THE NEW VERSION

TOOL FOR ENGINEERING FIRMS AND TECHNICAL DEPARTMENTS

Available in:



 Ask us for information

# QUICKFAN

SODECA  SELECTOR

**QuickFan Selector** has been developed by a team of technical and commercial experts in close collaboration with our clients, to obtain a practical tool that provides solutions for a wide range of users.



Easy search



Personalised reports



Always updated



Reports in minutes




Quickly browse through the catalogue with the tabs



A powerful product selection tool




Full information about the selected models



Examine the curves and characteristics of the models



Compare different models

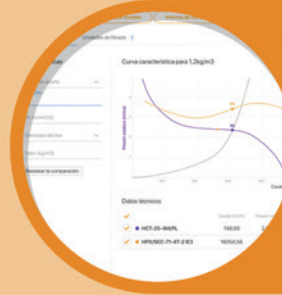

## PROJECT MODULE

### Prepare technical reports in minutes

- Select hundreds of models in a single step.
- Mass load your data in Excel.
- Edit and process the technical data sheets.
- Print out the report with a table of contents and a cover, edit it or send it to another QuickFan.



CAD 3D Models



Formats available



Always updated



Reports in minutes

## OVERPRESSURE CALCULATION IN STAIRCASE AREAS

- Rapid calculation of the necessary staircase overpressure flow rate for the most common stairway systems, in accordance with UNE-EN 12101:2006.
- Easy design configuration for each floor or evacuation route area.

## 3D CAD MODELS

- More than 2,000 models and configurations available.
- Download our fans in 3D Cad from our website.
- Choose from among more than 40 available Cad formats, including Revit.

**HEADQUARTERS****Sodeca, S.L.U.**

Pol. Ind. La Barricona  
Carrer del Metall, 2  
E-17500 Ripoll  
Girona, SPAIN  
Tel. +34 93 852 91 11  
Fax +34 93 852 90 42  
General sales: comercial@sodeca.com  
Export sales: ventilation@sodeca.com

**PRODUCTION PLANT****Sodeca, S.L.U.**

Ctra. de Berga, km 0,7  
E-08580 SANT QUIRZE DE BESORA  
Barcelona, SPAIN  
Tel. +34 93 852 91 11  
Fax +34 93 852 90 42  
General sales: comercial@sodeca.com  
Export sales: ventilation@sodeca.com

**EUROPE****FINLAND****Sodeca Finland, Oy**

HUITTINEN  
Sales and Warehouse  
Mr. Kai Yli-Sipilä  
Metsälinnankatu 30, PL2  
FI-32700 Huittinen  
Tel. +358 400 320 125  
orders.finland@sodeca.com

HELSINKI  
Smoke Control Solutions  
Mr. Antti Kontkanen  
Vilppulantie 9C  
FI-00700 Helsinki  
Tel. +358 400 237 434  
akontkanen@sodeca.com

HYVINKÄÄ  
Industrial Applications  
Mr. Jaakko Tomperi  
Niinistökatu 12  
FI-05800 Hyvinkää  
Tel. +358 451 651 333  
jtomperi@sodeca.com

**ITALIA****Marelli Ventilazione, S.R.L.**

Sr. Christian Tosetti  
Viale del Lavoro, 28  
37036 San Martino B.A.  
(VR), ITALY  
Tel. +39 045 87 80 140  
Fax +39 045 99 22 24  
info@marelliventilazione.com

**PORTUGAL****Sodeca Portugal, Unip. Lda.**

PORTO  
Rua Veloso Salgado  
1120/1138  
4450-801 Leça de Palmeira  
Tel. +351 229 991 100  
geral@sodeca.pt

LISBOA  
Pq. Emp. da Granja Pav. 29  
2625-607 Vialonga  
Tel. +351 219 748 491  
geral@sodeca.pt

ALGARVE  
Rua da Alegria S/N  
8200-557 Cortesões  
Tel. +351 289 092 586  
geral@sodeca.pt

**UNITED KINGDOM****Sodeca Fans UK, Ltd.**

Mr. Mark Newcombe  
Tamworth Enterprise Centre  
Philip Dix House, Corporation  
Street, Tamworth, B79 7DN  
UNITED KINGDOM  
Tel. +44 (0) 1827 216 109  
sales@sodeca.co.uk

**AMERICA****CHILE****Sodeca Ventiladores, SpA.**

Sra. Sofia Ormazábal  
Santa Bernardita 12.005  
(Esquina con Puerta Sur)  
Bodegas 24 a 26,  
San Bernardo, Santiago, CHILE  
Tel. +56 22 840 5582  
ventas.chile@sodeca.com

**COLOMBIA****Sodeca Latam, S.A.S.**

Sra. Luisa Stella Prieto  
Calle 7 No. 13 A-44  
Manzana 4 Lote 1, Montana  
Mosquera, Cundinamarca  
Bogotá, COLOMBIA  
Tel. +57 1 756 4213  
ventascolombia@sodeca.com

**PERU****Sodeca Perú, S.A.C.**

Sr. Jose Luis Jiménez  
C/ Mariscal Jose Luis de  
Orbegoso 331. Urb. El pino.  
15022, San Luis. Lima, PERÚ  
Tel. +51 1 326 24 24  
Cel. +51 994671594  
comercial@sodeca.pe

**RUSSIA****Sodeca, L.L.C.**

Mr. Stanislav Alifanov  
Severnoye Shosse, 10, room 201  
Business Park Plaza Ramstars  
140105 Ramenskoye,  
Moscow region, RUSSIA  
Tel. +7 495 955 90 50  
alifanov@sodeca.com



[www.sodeca.com](http://www.sodeca.com)

